



Jamb mounted video camera

Description

This enhanced definition color video camera is designed to monitor the usage and traffic flow of pedestrian doors.

Its sleek, low profile design provides a discreet method for improving loss prevention and limiting liability.

The RCA video output can be seamlessly integrated into most existing video surveillance systems.


Features & benefits

- Full color video with resolution of 480 x 720 (480p).
- · Standard RCA video output.
- Wide angle lens for complete view of door and traffic flow.
- Integrated voltage regulator for installation convenience.
- Low profile design minimizes accidental damage from shopping carts and other errant objects.
- Reversible left and right mounting for application flexibility.




Applications


Single swing




Dual Egress



Simultaneous pair




Sliding



Technical specifications

Supply voltage	6.6 – 36 VDC; ±10% 6.0 – 28 VAC; ±10%
Operating temperature	-22 °F – 140 °F (RH 95% max) (-30 °C – 60 °C)
Video output	1.0 (Vp-p) / 75Ω
Image sensor	CMOS
Horizontal resolution	480 TVL
NTSC output	720 (H) × 480 (W)
Sync system	Inter-Sync
Frame rate	30 fps
Minimum illumination	0.01 LUX
AE control	Auto
Gain control	Auto
Electronic shutter	1 s ~ 1/10,000 s
S/N ratio	> 50 dB
AWB	Auto
Dimensions	1.75" (W) × 3" (H) × 0.75" (D)


DX3336-062 dimensional drawing



Related product



DX3336-012 IXIO-DT1 WITH VIDEO CAMERA

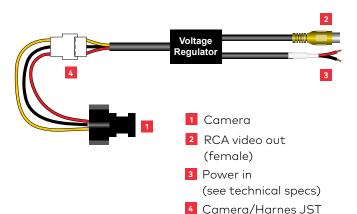



dormakaba USA Inc. Dorma Drive, Drawer AC Reamstown, PA 17567 844-SPECNOW

www.dormakaba.us

dormakaba Canada 1680 Courtney Park Dr. Unit 13 Mississauga, ON L5T 1R4 800.387.4938

www.dormakaba.ca